


# NEW MACHINES

## Available from Stock

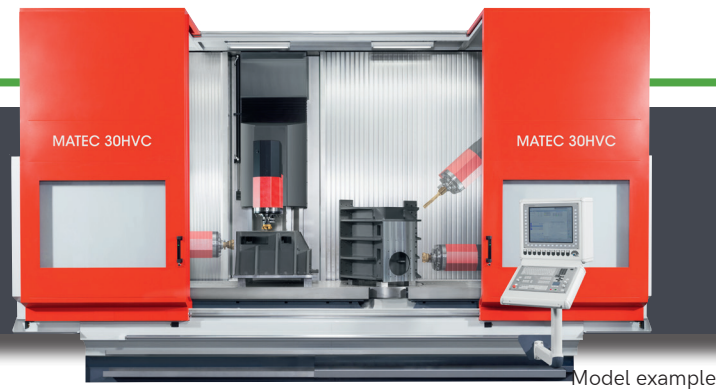

Ask for our best prices!

**MATEC 30HV**  
with Control Unit  
HEIDENHAIN TNC7

1 pce.  
in stock

available from December 2024

**X = 3,000 mm | Y = 825 mm | Z = 1,100 mm (horizontal) | 975 mm (vertical)**

### Basic equipment:

- 1-Axis NC swivel head, swivel radius 300 mm, swivel angle +/- 105°
- Motor spindle 15,000 1/min, 30 kW, 191 Nm
- Tool holder HSK A63
- 48 tool places  
tool Ø max. 135 mm, tool length max. 460 mm, tool weight max. 10 kg
- NC rotary table with **face plate Ø 800 mm**, integrated into the machine table, rotation speed max. 25 1/min., with worm drive
- Rapid traverse 30 m/min in all axes
- Working area, fully enclosed, with roof, ergonomic machine front in curved design for optimal accessibility of the machine interior
- Internal coolant supply 20 bar / tank capacity 900 l
- 3D radio touch probe

### Options - if the production status of the machine allows:

- Provision for additional tool magazine
- Additional tool magazine with **220 places**
- Additional control panel
- Mechanical mist collector CMC 1500 J-SP
- Partition wall for double work station system for Y-axis up to 800 mm
- Position of partition wall = 200 mm
- Tool breaking control and measuring of tool length
- Tactile tool breaking control
- RTS table probe for measuring, checking and tool breakage control of cutting tools in the machine
- Collision monitoring UTec